

# TUC-24G-HC~FGD01

 Undercounter Foodservice Refrigerator, 1 Glass Swing Door



Dimensions		Build		Technical	
External Width (mm)	610	Door Description	1 Full Glass Swing Door	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	627	Door Opening	Right (standard) or Left.	Refrigerant	R290
External Height (mm)	802	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26mm for rear bumpers and 42mm for door handle.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	1
Net Volume (Litres)	94	Air Intake Position	Front	Wattage	230
Gross Volume (Litres)	158	Ventilation Position	Front	Temperature Class	M1
Display Area (m <sup>2</sup> )	0.25	Clearance Required	Zero back and sides	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Supplied Shelves	2	Cord Length (Meters)	2.13	Testing Standard	EN 23953
Shelf Size (L x D mm)	One 508 x 352 + One 508 x 273	Internal Lighting	LED	EEC	A
Internal Net Height (mm)	600	Standard w/ Locks	standard	EEL	9.3
Unpackaged Weight (kg)	64			kWh/24hr	1.33
Packaged Weight (kg)	75			kWh/Annum	489
Packaged Dimensions (W x D x H mm)	788 x 762 x 1016			Defrost Type	Auto
Supplied Supports	Built-in recessed castors (7mm clearance)				



Specifications subject to change without notice.  
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)  
 EMEA [+41 61 563 07 05](tel:+41615630705)  
 Australia [+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TUC-24G-HC~FGD01

🇬🇧 Undercounter Foodservice Refrigerator, 1 Glass Swing Door

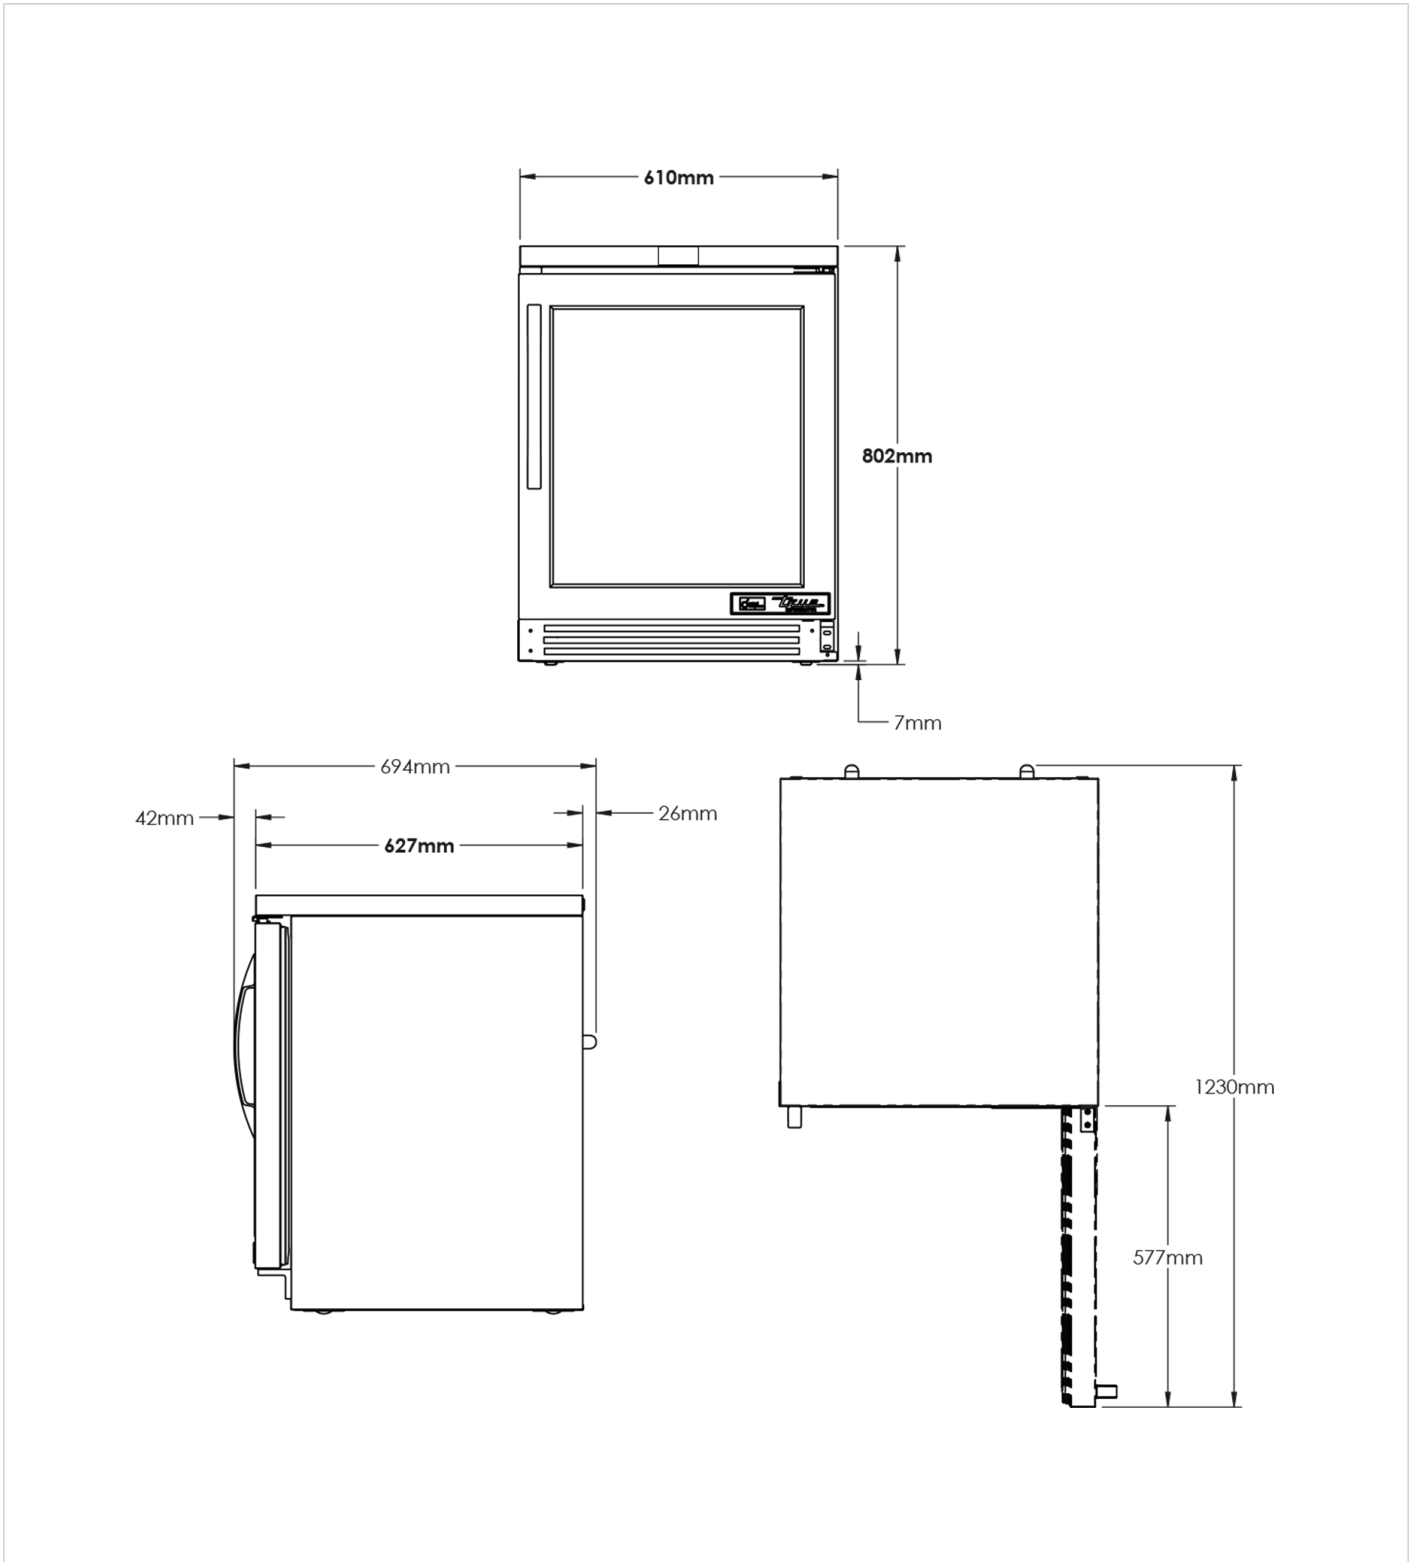

Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049  
EMEA +41 61 563 07 05  
Australia +61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

